


THE DISPLAY CHOICE OF PROFESSIONALS


# QF-Series LED-backlit Display 28"



Featuring UHD 3840 x 2160 resolution, the QF-Series delivers impeccable performance that enables users to experience stunning picture clarity and sharp details. Among a wide range of connections, its DisplayPort 1.2 supports true 4K content at a 60 Hz refresh rate. Sitting firmly on an ergonomically designed stand, the QF-Series is able to tilt, pivot, swivel, and adjust height to maximise productivity and viewing comfort. All this and more make the QF-Series perfect for professional applications requiring detailed and exquisite images.

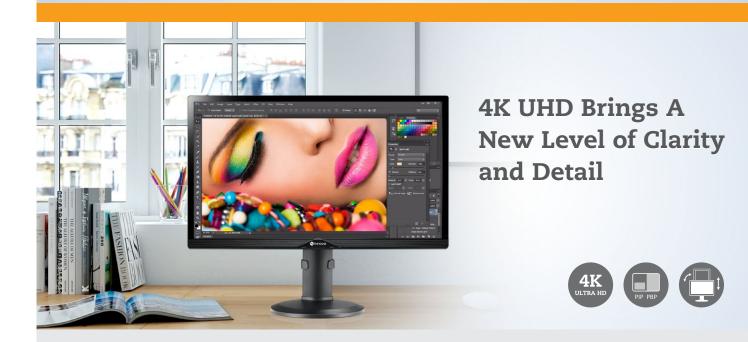





## **Experience the 4K Difference**

Don't miss a single detail with this powerful 4K display. View smooth 4K video and graphics with a new level of detail and clarity. Offering 8.3 million pixels, the QF-Series provides sufficient resolution for even the most demanding surveillance and digital signage applications.

### Versatility and Multitasking

Multiple signal source options, including HDMI and DisplayPort 1.2, offer the QF-series the versatility to integrate with other devices. Its connectivity, complemented by PIP/PBP capabilities, makes multitasking, such as studying different images or matching datamedical records, possible in a single display.





#### **Ergonomic Design**

A versatile stand is also a highlight of the QF-Series. Professionals can enjoy both comfort and convenience while using the QF-Series displays, with a height adjusting stand that allows for tilting, pivoting, swiveling, or switching to either portrait or landscape mode as warranted.

#### Features

- $\bullet$  4K UHD 3840 x 2160 resolution
- 10-bit colour depth ensures delicate colour representation
- PiP/PbP functions enable multi-source viewing simultaneously
- Versatile connectivity: VGA, DVI (Dual-link), DisplayPort, HDMI, Audio
- Built-in USB hub for easy connection to peripheral devices
- Kensington security slot
- Flexible display orientation: Landscape/ Portrait
- VESA mount compatibility for flexible installation
- Height adjustable stand allows users to tilt, pivot and swivel
- Built-in speakers



Panel Type



# **Specifications**

Panel

LED-Backlit TFT LCD (TN Technology)
27.9"
UHD 3840 x 2160
0.160 mm
300 cd/m <sup>2</sup>
20,000,000:1 (DCR)
170°/160°
1.07B
3 ms

QF-28

	Panel Size Max. Resolution Pixel Pitch Brightness Contrast Ratio Viewing Angle Disply Colour Response Time Surface Treatment	27.9" UHD 3840 x 2160 0.160 mm 300 cd/m <sup>2</sup> 20,000,000:1 (DCR) 170°/160° 1.07B 3 ms Anti-Glare Treatment (Haze 25%), 3H Hard Coating
Frequency (H/V)	H Freq. V Freq.	30 kHz-160 kHz 23 Hz-80 Hz
Input	DisplayPort HDMI DVI VGA	1.2 x 1 1.4 x1 24-Pin DVI-D x 1 15-Pin D-Sub x 1
Other Connectivity	USB	USB HUB (2.0 x 2 / 3.0 x 1 / power outlet x 1 (5V1.5A)) / USB upstream Type-B x 1
Audio	Audio In Audio Out Internal Speakers	Stereo Audio Jack (3.5 mm) Stereo Audio Jack (3.5 mm) 3W x 2
Power	Power Supply Power Requirements On Mode Stand-by Mode Off Mode	Internal AC 100-240V, 50/60 Hz 48W (On) < 0.5W < 0.5W
Operating Conditions	Temperature Humidity	0°C-40°C (32°F-104°F) 10%-85% (non-condensing)
Storage Conditions	Temperature Humidity	-20°C-55°C (-4°F-131°F) 5%-93% (non-condensing)
Mounting	VESA FPMPMI	Yes (100 mm x 100 mm)
Stand	Tilt Pivot Swivel Height Adjustment	-5° to 23° 0° to 90° ±160° 130 mm
Security	Kensington Security Slot	Yes
Dimensions	w/Base (W x H x D) w/o Base (W x H x D) Packaging (W x H x D)	659.7 x 555.4 x 224.5 mm (26.0" x 21.9" x 8.8") 659.7 x 391.0 x 49.3 mm (26.0" x 15.4" x 1.9") 765.0 x 493.0 x 224.0 mm (30.1" x 19.4" x 8.8")
Weight	w/Base w/o Base Packaging	7.9 kg (17.4 lb) 5.3 kg (11.7 lb) 9.8 kg (21.6 lb)
Regulation Approval	Certifications & Compliance	CE, CB, FCC,WEEE, RoHS, REACH, EAC
Accessories	Supplied	Power Cord, DVI Cable, DisplayPort Cable, Warranty Card, CD
Optional Accessories		Wall Mount: PMK-01 Desk Mount: DMC-01 Ceiling Mount (Landscape only): CMP-01 + WMK-03 Wall Mounts (Landscape only): WMA-01, WMK-01, WMK-03

All specifications are subject to change without prior notice. Copyright © 2019 AG Neovo. All rights reserved. The name AG Neovo is a trademark of AIC. All other trademarks are the property of their respective owners. P/C: QF28A0 Version 1.2, 20190521



displays.agneovo.com

**Global Headquarters** Taipei, Taiwan

**EMEA Regional Headquarters** Capelle a/d Ijssel, The Netherlands

North & South America Regional Headquarters San Jose, CA, U.S.A.

**Asia-Pacific Regional Headquarters** Taipei, Taiwan

**Canada Sales Office** Vancouver, B.C., Canada

**China Sales Office** Shanghai, China

**Czech Republic Sales Office** Brno, Czech Republic

**Denmark Sales Office** Støvring, Denmark

**Germany Sales Office** Mechernich, Germany

**Italy Sales Office** Livorno, Italy

**Poland Sales Office** Warsaw, Poland

**Spain Sales Office** Barcelona, Spain

**Ukraine Sales Office** Lviv, Ukraine

displays.agneovo.com

